


Silencers



URD series discharge silencers for rotary positive displacement blowers are heavy duty, all welded units constructed of carbon steel sheet and plate. For use with either pressure or vacuum systems. Silencers come painted with rust inhibitive primer.

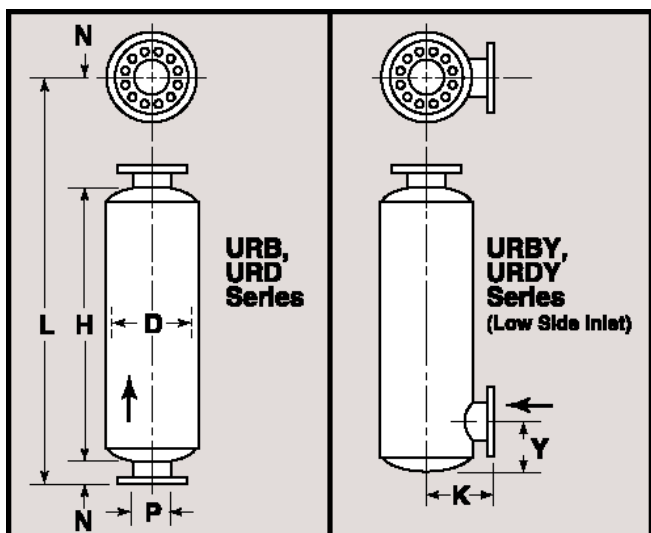

10 H.P. Vacuum Loader
Shown with URB Silencer.

P (SIZE)	D	L	N	H	K	URBY, URDY		WGT.
						MIN.	MAX.	
1	4 1/2	21	2	17	-	-	-	10
1 1/2	6 1/2	24	2	20	-	-	-	15
2	8	33	3	27	7	FIXED AT 6		20
2 1/2	10	34	3	28	8	FIXED AT 7		30
3	10	46	3	40	8	FIXED AT 7		40
3 1/2	12	52	3	46	9	FIXED AT 8		55
4	14	53	3	47	10	6	22	70
5	16	65	3	59	11	6 1/2	29	120
6	18	72	3	66	12	8	32	160
8	22	97	3 1/2	90	14 1/2	9	48	370
10	26	122	3 1/2	115	16 1/2	11	63 1/2	550
12	30	135	3 1/2	128	18 1/2	12 1/2	69	800
14	36	161	3 1/2	154	21 1/2	14 1/2	81	1250
16	42	181	3 1/2	174	24 1/2	16 1/2	92 1/2	1600
18	48	188	3 1/2	181	27 1/2	18 1/2	98	2300
20	48	202	4 1/2	193	28 1/2	19 1/2	103	2500
22	54	204	4 1/2	195	31 1/2	21 1/2	103	2950
24	54	239	4 1/2	230	31 1/2	22 1/2	126	3450
26	60	259	4 1/2	250	34 1/2	25	132	4400
28	66	279	4 1/2	270	37 1/2	27	144	6150
30	72	304	4 1/2	295	40 1/2	29	161	7250

Dimensions in inches, weight in lbs.



Sizes 4.0" and larger are equipped with flanged connections drilled to 125/150 lb. ANSI specifications. Smaller sizes are standard with male threaded pipe nipples.