

Compression Couplings for Tubing and Pipe




Tubing or Nom. Pipe (IPS) Size	Pipe A	Coupling Code	Length B	No. of Bolts	Size of Bolts	Weight Each (lbs.)
1-1/2" Tubing	1.500	1-1/2-2C-OD	4"	2	1/2 x 1-3/4	2.0
	1.500	1-1/2-3C-OD	6"	3	1/2 x 1-3/4	2.9
1-1/2" Pipe	1.900	1-1/2-2C	4"	2	1/2 x 1-3/4	2.0
	1.900	1-1/2-3C	6"	3	1/2 x 1-3/4	3.1
2" Tubing	2.000	2-2C-OD	4"	2	1/2 x 1-3/4	2.1
	2.000	2-3C-OD	6"	3	1/2 x 1-3/4	3.1
2" Pipe	2.375	2-2C	4"	2	1/2 x 1-3/4	2.2
	2.375	2-3C	6"	3	1/2 x 1-3/4	3.5
	2.375	2-4C	8"	4	1/2 x 1-3/4	4.7
2-1/4" Tubing	2.250	2-1/4-2C-OD	4"	2	1/2 x 1-3/4	2.2
	2.250	2-1/4-3C-OD	6"	3	1/2 x 1-3/4	3.3
2-1/2" Tubing	2.500	2-1/2-2C-OD	4"	2	1/2 x 1-3/4	2.6
	2.500	2-1/2-3C-OD	6"	3	1/2 x 1-3/4	3.4
2-1/2" Pipe	2.875	2-1/2-2C	4"	2	1/2 x 1-3/4	2.4
	2.875	2-1/2-3C	6"	3	1/2 x 1-3/4	3.7
	2.875	2-1/2-4C	8"	4	1/2 x 1-3/4	5.0
3" Tubing	3.000	3-2C-OD	4"	2	5/8 x 2	3.2
	3.000	3-3C-OD	6"	3	5/8 x 2	4.5
	3.000	3-4C-OD	8"	4	5/8 x 2	5.9
3" Pipe	3.500	3-2C	4"	2	5/8 x 2	3.4
	3.500	3-3C	6"	3	5/8 x 2	5.1
	3.500	3-4C	8"	4	5/8 x 2	6.6
3-1/2" Tubing	3.500	3-2C	4"	2	5/8 x 2	3.4
	3.500	3-3C	6"	3	5/8 x 2	5.1
	3.500	3-4C	8"	4	5/8 x 2	6.6
3-1/2" Pipe	4.000	3-1/2-2C	4"	2	5/8 x 2	3.7
	4.000	3-1/2-3C	6"	3	5/8 x 2	5.3
	4.000	3-1/2-4C	8"	4	5/8 x 2	7.2
4" Tubing	4.000	3-1/2-2C	4"	2	5/8 x 2	3.7
	4.000	3-1/2-3C	6"	3	5/8 x 2	5.3
	4.000	3-1/2-4C	8"	4	5/8 x 2	7.2
4" Pipe	4.500	4-2C	4"	2	5/8 x 2	3.8
	4.500	4-3C	6"	3	5/8 x 2	5.5
	4.500	4-4C	8"	4	5/8 x 2	7.7
5" Tubing	5.000	4-1/2-2C	4"	2	5/8 x 2	4.2
	5.000	4-1/2-3C	6"	3	5/8 x 2	6.2
	5.000	4-1/2-4C	8"	4	5/8 x 2	8.1
5" Pipe	5.563	5-2C	4"	2	5/8 x 2	4.6
	5.563	5-3C	6"	3	5/8 x 2	6.8
	5.563	5-4C	8"	4	5/8 x 2	8.8
6" Tubing	6.000	6-2C-OD	4"	2	5/8 x 2	4.7
	6.000	6-3C-OD	6"	3	5/8 x 2	7.0
	6.000	6-4C-OD	8"	4	5/8 x 2	9.4
	6.000	6-5C-OD	10"	5	5/8 x 2	11.8
6" Pipe	6.625	6-2C	4"	2	5/8 x 2	5.3
	6.625	6-3C	6"	3	5/8 x 2	7.6
	6.625	6-4C	8"	4	5/8 x 2	10.4
	6.625	6-5C	10"	5	5/8 x 2	14.3
8" Tubing	8.000	8-2C-OD	4"	2	3/4 x 3	11.0
	8.000	8-3C-OD	6"	3	3/4 x 3	14.3
	8.000	8-4C-OD	8"	4	3/4 x 3	18.0
	8.000	8-5C-OD	10"	5	3/4 x 3	22.0
8" Pipe	8.625	8-2C	4"	2	3/4 x 3	11.5
	8.625	8-3C	6"	3	3/4 x 3	14.6
	8.625	8-4C	8"	4	3/4 x 3	18.8
	8.625	8-5C	10"	5	3/4 x 3	23.0

Compression tubing and pipe couplings are designed for permanent installation in the joining of either plain end, threaded, grooved or a combination of any of these joints. The band type construction holds the entire surface of the joint in uniform compression.

Couplings are made of heavy gauge zinc plated steel...prices of aluminum or stainless steel couplings quoted on request.

Gaskets furnished standard in black neoprene. Gaskets also available in white neoprene, red rubber and a variety of other material at a slight extra charge.

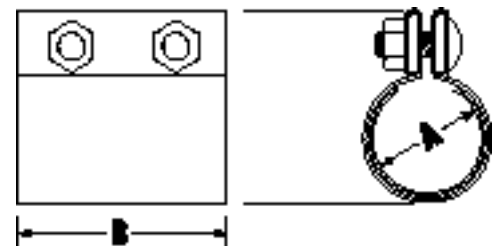

Pricing on larger couplings available upon request.

WHEN ORDERING:

1. Always give the Code No. and O.D. of the pipe or tube on which coupling will be used.
2. Stainless steel grounding strips are standard on all couplings.
3. Aluminum grounding strips or couplings without grounding strips available at same price.